

Welding Coolant Gel

Product # 312

Welding Coolant Gel is an easy to use, gel barrier that shields surfaces from the intense heat generated during various welding operations. The viscous formula stays in place on surrounding surfaces made of metal, wood, wallboard, insulation, and other construction materials to protect them and prevent the transfer of heat beyond those surfaces.

Use on:

- Welding
- Refrigeration or furnace repair and installation
- Pipe Installation
- Construction

Features and Benefits

- Concentrated cooling gel absorbs heat to protect surfaces and components while soldering brazing or welding
- Gels on contact for no-drip coverage
- Odorless, skin-safe, non-toxic and easy clean up

Properties

Appearance.....	Liquid
Fragrance.....	None
Specific gravity.....	1.0
pH.....	6 - 8
VOC content.....	0% by Wt.
Application.....	Spray surface

Directions

Complete directions on product label
Shake bottle before use and spray Welding Coolant Gel on surface immediately before applying heat source. Be sure surface is completely covered and reapply as needed to complete job. If necessary residue can be removed by wiping with a clean cloth.

Active Ingredients

Water	7732-18-5
Polyacrylic Acid.....	9003-01-4
Sodium Hydroxide.....	1310-73-2
Sodium Chloride.....	7647-14-5
2-methyl-2H-isothiazol-3-one.....	2682-20-4


CAS Number

Safety

Keep out of the reach of children

DOT Shipping (ground transportation)

Proper Shipping Name:	None
Class:	None
ID Number:	None
Packing Group:	None

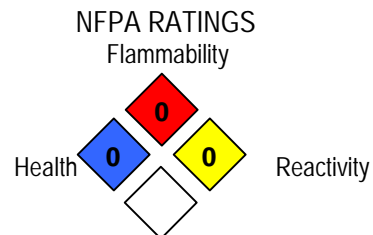

Quantities

12 quarts/case