

# GRAPHITE LUBRICANT

Product # 8211

## High-temperature dry lubricant

This high-grade, dry graphite aerosol is designed to eliminate friction and protect high-use equipment from rust and corrosion. It's a durable, heavy-duty lubricant that can endure extreme temperature fluctuations ranging from -100°F up to 800°F. Plus, its dry formula will not collect dirt and dust.

### Use on:

- Industrial Tools
- Hardware
- Accessories
- Conveyors
- Wheels And Castors
- Hinges
- Drawer Glides
- Nuts and Bolts

### Effective Against

- Friction
- Rust and Corrosion

### Features and Benefits

- Penetrates deeply, dries quickly and sheds moisture.
- Hardens to a tough, long-lasting, tack-free film.
- Can endure temperature variations as high as 800° F to a low of -100° F.

### Properties

Appearance.....	Grey Liquid
Fragrance.....	Hydrocarbon
Specific gravity.....	>1.0
Flash point.....	<156° F (est.)
VOC content.....	<85% by wt.
Spray Pattern.....	Spray
Extension Tube.....	No

### Directions Complete directions on product label

Simply apply a generous amount on parts and equipment.  
Reapply as often as needed.

### Active Ingredients

Toluene.....	
Graphite.....	
Liquefied Petroleum Gas.....	


### CAS Number

108-88-3  
7782-42-5  
68476-85-7

**Safety: DANGER:** Extremely Flammable Aerosol. May be fatal if swallowed and enters airways. Causes skin irritation. May cause drowsiness or dizziness. May cause genetic defects. May cause cancer (inhalation). May cause damage to organs through prolonged exposure or repeated exposure. Keep out of the reach of children.

### DOT Shipping (ground transportation)

Proper Shipping Name:	LQ
Class:	LQ
ID Number:	None
Packing Group:	None

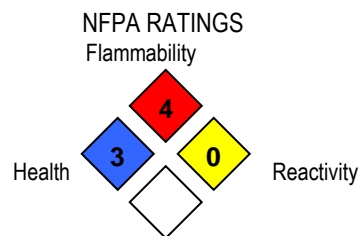

### Quantities

12 cans/case  
12 ounce net weight

**TOTAL**  
SOLUTIONS®